





Spezifikationen / Specifications

Phase	2 Phase
Step Angle / Schrittwinkel	1.8° ± 5% / Step
Voltage / Nennspannung	4.16 V
Current / Nennstrom	1.3 A/Phase
Resistance / Widerstand	3.2 ± 10% Ω/Phase
Inductance / Induktanz	5.5± 20% mH/Phase
Holding Torque / Haltemoment	52 N.cm Min
Detent Torque / Rastmoment	2.6 N.cm Max
Insulation Class / Isolierungs Klasse	B
Lead Style / Kabel Art	AWG26 UL1007
Rotor Torque / Rotorträgheit	68 g.cm ²

Haltemoment Kurve / Torque Curve

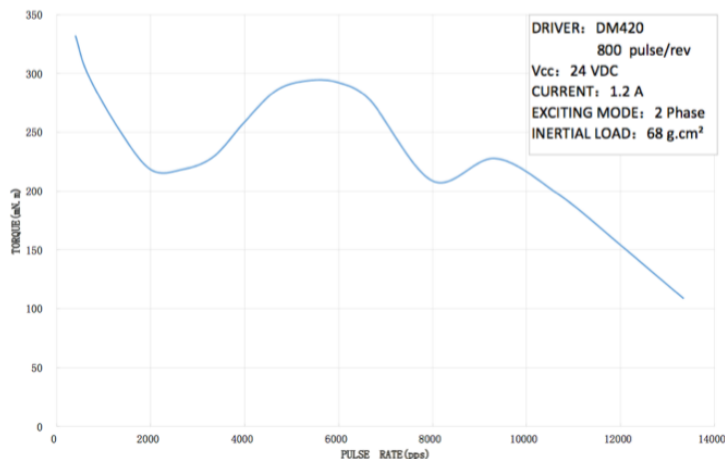

Mechanische Abmessungen / Mechanical Dimensions

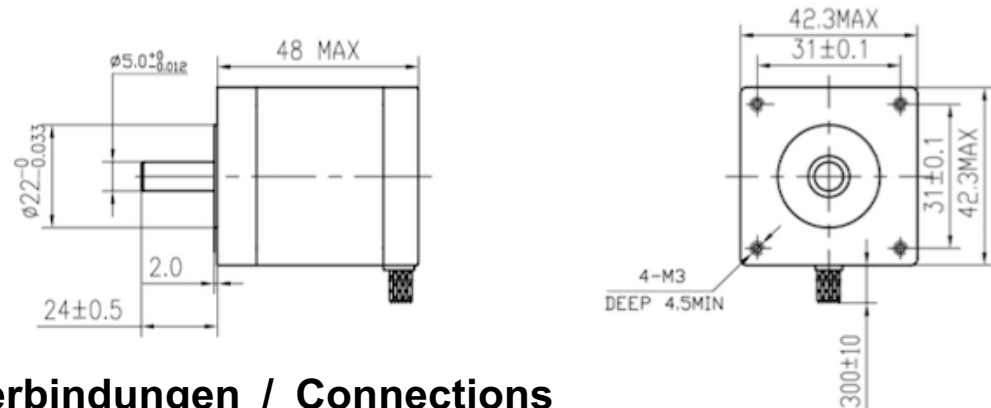

Verbindungen / Connections

